

LED Panel 600x1200



Produkteigenschaften


- Edge lit LED flat panel. 60 W, Neutral White, 4000 K, 5300 lumens, 88 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 10.5 x 1195 x 595 mm



PRODUKTÜBERSICHT

Technologie	LED
Housing	Powder coated steel
Montage	Deckeneinbau
Einbau Klassifizierung	Enclosed
Environment	Internal
Allgemeine Anwendungsbereiche	Education, Hospitality, Office, Retail
Zertifizierungen	EUNEW008
ETIM Class	EC002892
E-Nummer FI	4274378
E-Nummer SE	7013618
Fixture luminous flux (lm)	5300
Luminaire efficacy (lm/W)	88
Leuchtenbetriebswirkungsgrad (%)	100
Farbtemperatur (K)	4000
Lichtfarbe	Neutral White
Farbwiedergabeindex (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	120
Glare control	UGR <25
Photometrische Risikogruppe	Exempt Group 0
Systemleistung gesamt (W)	60
Electrical protection	Class II
Betriebsgerätetyp	Elektronisch
LED Flickering Rate	Ultra low (5% or less)
Mittlere Lebensdauer (Nominal) (h)	50000
Gehäusefarbe	Weiß
IP Bewertungsklasse	IP20
IK Bewertungsklasse	IK05
Lamps	Yes
Lampe enthalten	INTEGRATED LED

PHOTOMETRIE

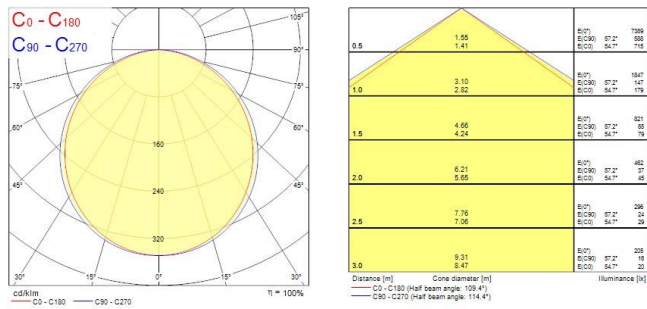

TECHNISCHE ZEICHNUNGEN

